Terminal Terlindung Nilon Loyang Lelaki & Wanita - Terminal Lengan Bendera

Model No. JW-TM03



SPECIFICATIONS

Bahan	Loyang
Sarung	Nilon
Suhu	105 darjah
Rawatan Permukaan	Penyaduran timah
Jenis	Terminal lelaki, terminal wanita, terminal lengan bendera

Terminal sarung bertebat nilon tembaga lelaki dan wanita, terminal lengan bendera gulung
Terminal sarung penebat wanita, terminal lelaki, terminal bendera.

Pelbagai spesifikasi memberi anda pelbagai pilihan.

Warnanya berbeza dan jelas sepintas lalu semasa digunakan

Alat am boleh dikelim tanpa kimpalan tempat dan pemprosesan lain

Bahan Loyang

Nilon Sarung

Suhu 105 darjah

Rawatan permukaan penyaduran timah

High Quality | Resistant | Multicolor | Safe

With insulated sheathed tube terminal

Complete models to meet your shopping needs



With insulation sheath fork terminal

Safe and secure crimping (for flexible cords)
Current: 19A-48A
Bolt diameter: 3.2~10.5mm




With insulating sheath round terminal


Flame retardant tin plating, good electrical conductivity

Maximum current: 19A-48A
Bolt diameter: 3.2~10.5mm



Insulation sheath female terminal (oval mouth)

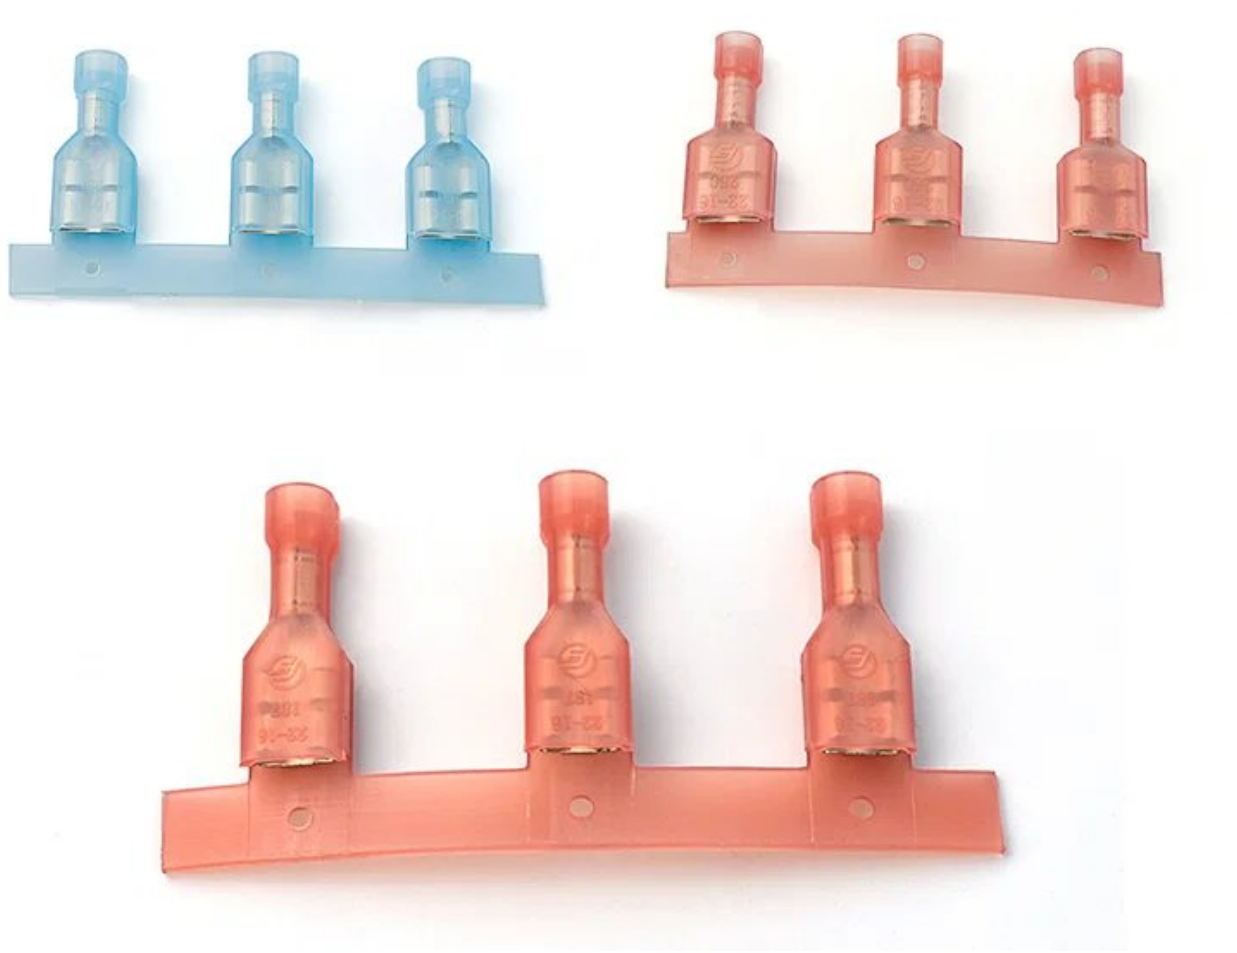

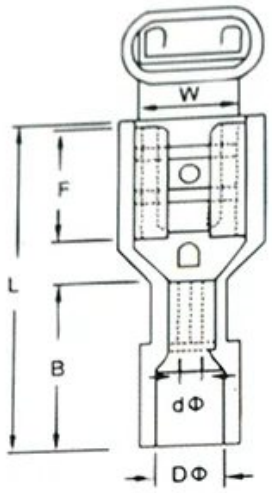



Material: Brass
Sheath: Nylon
Temperature: 105°C
Surface Treatment: Tin Plating

UL LISTED E341425 c UL CE SGS

型号 Item NO	导线截面mm² Cable Size A.W.G	最大电流 Max Current	接插规格 Connecting spec.	材料厚度 Thickness (mm)	尺寸 Dimension(mm) W	F	L	B	Dϕ	dϕ	颜色 Color
FDFN 1.25-110(5)	0.5~1.5 (22~16)	10A	0.5×2.8	0.3	4.0	6.4	19.0	10.5	4.5	1.7	红 red
FDFN 1.25-110(8)			0.8×2.8	0.3	4.0	6.4	19.0	10.5	4.5		
FDFN 1.25-187(5)			0.5×4.75	0.4	5.0	6.4	21.4	10.5	3.5		
FDFN 1.25-187(8)			0.8×4.75	0.4	5.0	6.4	21.4	10.5	3.5		
FDFN 1.25-250			0.8×6.35	0.4	7.6	7.3	22.0	11.0	4.5		
FDFN 2-187(5)	1.5~2.5 (16~14)	15A	0.8×4.75	0.4	5.0	6.4	21.4	10.5	4.2	2.3	蓝 blue
FDFN 2-187(8)			0.8×4.75		5.0	6.4	21.4	10.5	4.2	2.3	
FDFN 2-250			0.8×6.35		7.6	7.3	22.0	11.0	4.8	2.3	
FDFN 5-250	4~6 (12~10)	24A	0.8×6.35	0.45	7.6	7.3	24.2	13.0	6.7	3.4	黄 yellow

Insulation sheath female terminal (square mouth)

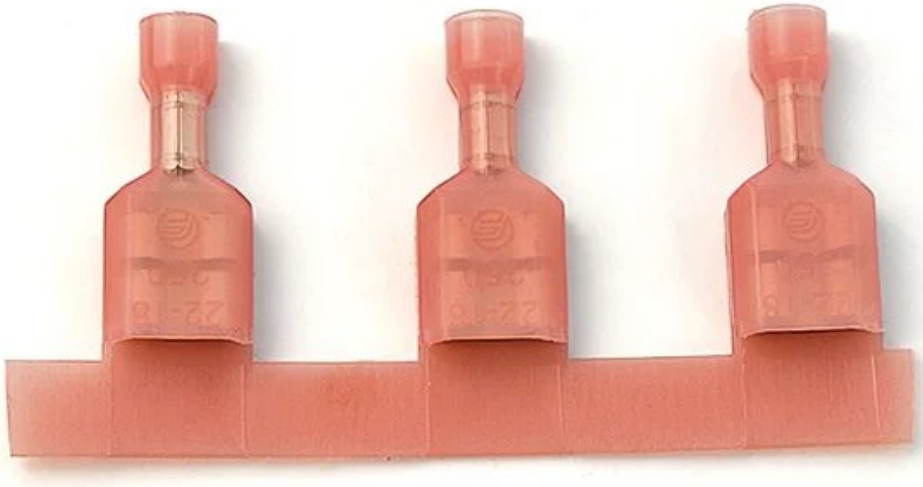

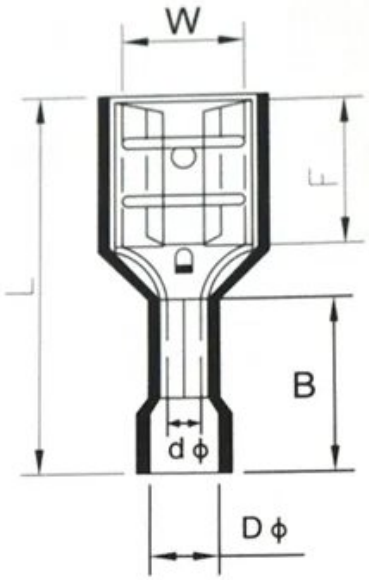


Material: Brass
Sheath: Nylon
Temperature: 105°C
Surface Treatment: Tin Plating

Item NO	Cable Size A.W.G	Max Current	Connecting spec.	Thickness (mm)	Dimension(mm)						Color
					W	F	L	B	D ϕ	d ϕ	
FDFN 1.25-110(5)	0.5~1.5 (22~16)	10A	0.5 × 2.8	0.3	4.0	6.4	18.7	9.0	3.1	1.7	紅 red
FDFN 1.25-110(8)			0.8 × 2.8	0.3	4.0	6.4	18.7	9.0	3.1		
FDFN 1.25-187(5)			0.5 × 4.75	0.35	5.9	6.4	22.0	10.5	3.7		
FDFN 1.25-187(8)			0.8 × 4.75	0.35	5.9	6.4	22.0	10.5	3.7		
FDFN 1.25-250			0.8 × 6.35	0.4	7.6	7.6	22.0	10.0	4.5		
FDFN 2-110(5)	1.5~2.5 (16~14)	15A	0.5 × 2.8	0.3	4.0	6.4	18.7	9.0	4.2	2.3	藍 blue
FDFN 2-110(8)			0.8 × 2.8	0.3	4.0	6.4	18.7	9.0	4.2	2.3	
FDFN 2-187(5)			0.8 × 4.75	0.35	5.9	6.4	21.8	10.0	4.2	2.3	
FDFN 2-187(8)			0.8 × 4.75	0.35	5.9	6.4	21.8	10.0	4.2	2.3	
FDFN 2-250			0.8 × 6.35	0.4	7.6	7.6	22.0	11.0	4.3	2.3	
FDFN 5.5-250	4~6 (12~10)	24A	0.8 × 6.35	0.45	7.6	7.6	23.7	13.0	8.5	3.4	黃 yellow

Fully insulated sheath male terminal (square mouth)





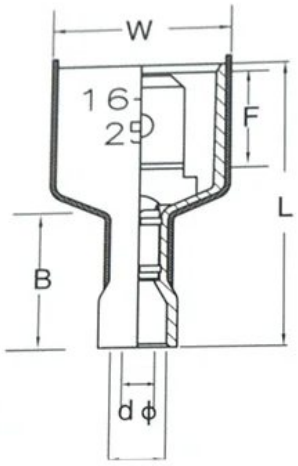

Material: Brass
Sheath: Nylon
Temperature: 105°C
Surface Treatment: Tin Plating

Item NO	Cable Size A.W.G	Max Current	Connecting spec.	Thickness (mm)	Dimension(mm) W	F	L	B	D ϕ	d ϕ	Color
MDFN1.25-187(5)	0.5~1.5 (22~16)	10A	0.5x4.8	0.5	10.4	6.3	20.4	10.0	3.6	1.7	red
MDFN1.25-187(8)	0.5~1.5 (22~16)	10A	0.8x4.8	0.8	10.4	6.3	20.4	10.0	3.6	1.7	
MDFN1.25-250	0.5~1.5 (22~16)	10A	0.8x6.35	0.8	12.3	7.7	21.8	10.0	3.6	1.7	


Item NO	Cable Size A.W.G	Max Current	Connecting spec.	Thickness (mm)	Dimension(mm) W	F	L	B	D ϕ	d ϕ	Color
MDFN2-187(5)	1.5~2.5 (16~14)	15A	0.5x4.8	0.5	10.4	6.3	20.4	10.0	4.3	2.3	blue
MDFN2-187(8)	1.5~2.5 (16~14)	15A	0.8x4.8	0.8	10.4	6.3	20.4	10.0	4.3	2.3	
MDFN2-250	1.5~2.5 (16~14)	15A	0.8x6.35	0.8	12.3	7.7	21.8	10.0	4.3	2.3	

Item NO	Cable Size A.W.G	Max Current	Connecting spec.	Thickness (mm)	Dimension(mm) W	F	L	B	D ϕ	d ϕ	Color
MDFN5.5-250	4~6 (12~10)	24A	0.8x6.35	0.8	12.3	7.7	21.8	10.0	6.5	3.4	yellow

Fully Insulated Sheathed Flag Female Terminals





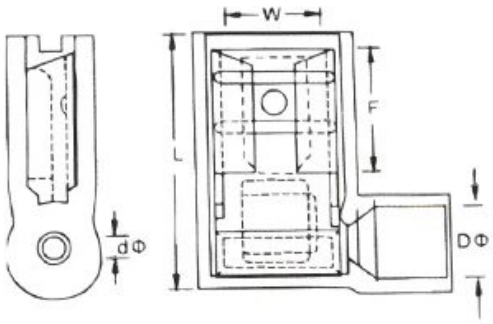

Material: Brass
Sheath: Nylon
Temperature: 105°C
Surface Treatment: Tin Plating

型号 Item NO	导线截面mm² Cable Size A.W.G	最大电流 Max Current	接插规格 Connecting spec.	材料厚度 Thickness (mm)	尺寸 Dimension(mm) W	F	L	Dϕ	dϕ	颜色 Color
FLDNY1.25-187(5)	0.5~1.5 (22~16)	10A	0.5x4.8	0.4	6.9	7.0	16.6	4.6	1.7	红 red
FLDNY1.25-187(8)	0.5~1.5 (22~16)	10A	0.8x4.8	0.4	6.9	7.0	16.6	4.6	1.7	
FLDNY1.25-250	0.5~1.5 (22~16)	10A	0.8x6.35	0.4	8.5	8.0	16.6	4.6	1.7	

型号 Item NO	导线截面mm² Cable Size A.W.G	最大电流 Max Current	接插规格 Connecting spec.	材料厚度 Thickness (mm)	尺寸 Dimension(mm) W	F	L	Dϕ	dϕ	颜色 Color
FLDNY2-187(5)	1.5~2.5 (16~14)	15A	0.5x4.8	0.4	6.9	7.0	16.6	5.3	2.3	蓝 blue
FLDNY2-187(8)	1.5~2.5 (16~14)	15A	0.8x4.8	0.4	6.9	7.0	16.6	5.3	2.3	
FLDNY2-250	1.5~2.5 (16~14)	15A	0.8x6.35	0.4	8.5	8.0	16.6	5.3	2.3	

Brass Nylon insulated sheath male and female terminals Roll flag sleeves terminal, Sleeves Terminal, Insulated Terminal

Brass Nylon insulated sheath male and female terminals Roll flag sleeves terminal, Sleeves Terminal, Insulated Terminal

Brass Nylon insulated sheath male and female terminals Roll flag sleeves terminal, Sleeves Terminal, Insulated Terminal

Brass Nylon insulated sheath male and female terminals Roll flag sleeves terminal, Sleeves Terminal, Insulated Terminal