Terminal Cincin Nilon Berterusan 2000PCS/Roll - Sambungan Kuasa Industri

Model No. JW-TM01



SPECIFICATIONS

Bahan	Tembaga
Suhu Operasi	75/105 darjah
Sarung	Nilon PVC
Rawatan Permukaan	Penyaduran timah
Kuantiti	2000PCS/Roll
Aplikasi	Sambungan peralatan unit pengedaran kuasa

terminal cincin bertebat nilon yang ditekan sejuk berterusan Terminal hujung kord biru, terminal cincin bertebat nilon yang ditekan sejuk berterusan Terminal hujung kord biru, Terminal Akhbar Sejuk Berterusan, Terminal Hujung Kord, Terminal
Cincin Terlindung Nilon biru Terminal
cincin bertebat PVC nilon biru Pemilihan bahan yang indah dan baik menjadikan produk prestasi keselamatan tinggi dan hayat perkhidmatan yang panjang.
Sesuai untuk sambungan peralatan dalam unit pengedaran kuasa.
Bahan Suhu Tembaga
75/105 darjah
Sarung Nilon
PVC Rawatan Permukaan Tin penyaduran
Q.ty 2000PCS / Roll



With insulation sheath blade terminal


Current: 18A-48A
Copper has good conductivity
Flame retardant and tinned



With insulation sheath spring terminal




Reliable quality of real materials
Exquisite and good selection of materials makes the product high safety performance and long service life
Copper tinned terminal block
High-quality red copper conductive must be strong
Surface tin plating process to resist oxidation
PVC insulation
Flame retardant material
Two materials optional
Nylon insulation
Flame retardant material

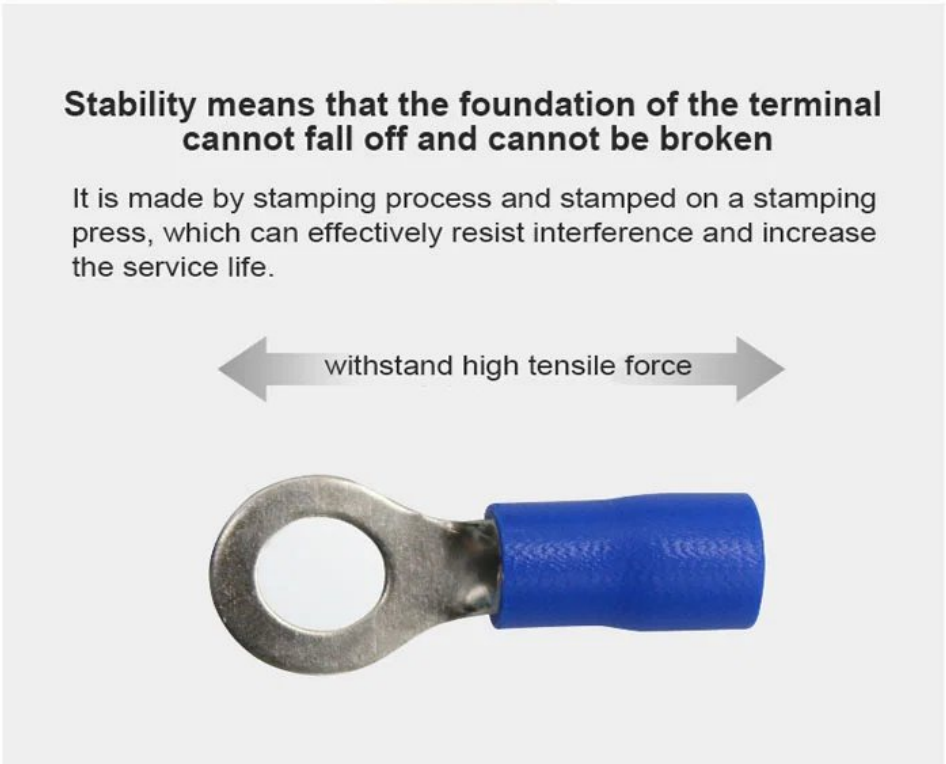
Stability means that the foundation of the terminal cannot fall off and cannot be broken
It is made by stamping process and stamped on a stamping press, which can effectively resist interference and increase the service life.
withstand high tensile force

With insulating sheath round terminal


Flame retardant tin plating, good electrical conductivity


Maximum current: 19A-48A
Bolt diameter: 3.2~10.5mm



Sample renderings display

Applicable cord

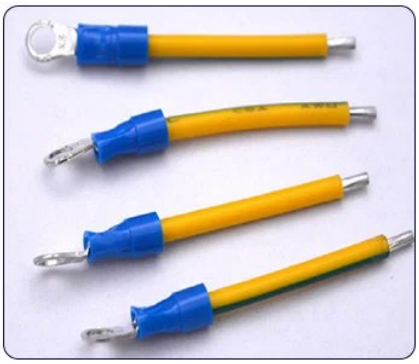

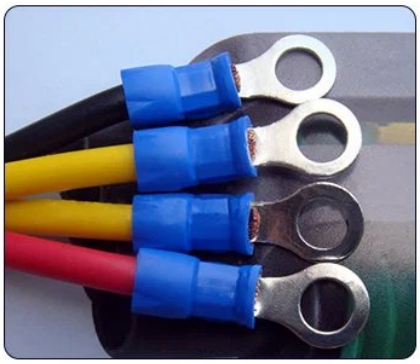
Product parameters

Material: copper
Temperature: 75℃/105℃
Sheath: Nylon/PVC
Surface Treatment: Tin Plating





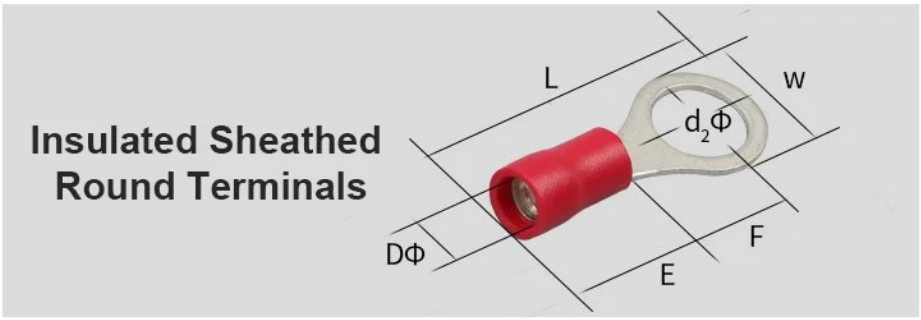

Red (nylon/PVC [add P at the back] optional)

Item NO	Cable Sze A.W.G	Thickness (mm)	Max Current	USA Screw	ScrewDia.d2(mm)	Size				DΦ
						W	L	F	E	
RVN1.25-3	0.5-1.5 (22-16)	0.75	19A	#4	3.2	5.7	18.5	5.0	10.0	4.0
RVN1.25-3.5 S				#6	3.7	5.7	185	5.0		
RVN1.25-3.5M				#6	3.7	6.6	20.0	6.3		
RVN1.25-35 L				#6	3.7	8.0	215	7.0		
RVN1.25-4 S				#8	4.3	6.6	19.5	63		
RVN1.25-4L				#8	4.3	8.0	21.5	7.0		
RVN1.25-5S				#10	5.3	8.0	21.5	7.0		
RVN1.25-5L				#10	5.3	9.8	23.5	8.5		
RVN1.25 6S				1/4	6.4	9.8	23.0	8.5		
RVN1.25-6L				1/4	6.4	11.6	27.5	11		
RVN1.25-8				5/16	8.4	11.6	27.5	11		
RVN1.25-10				3/8	10.5	13.6	31.6	14		

Blue (nylon/PVC [add P at the back] optional)

Item NO	Cable Sze A.W.G	Thickness (mm)	Max Current	USA Screw	ScrewDia.d2(mm)	Size				DΦ
						W	L	F	E	
RVN2-3	1.5-25 (16-14)	0.8	27A	#4	3.2	6.6	17 3	4.3	10.0	4.6
RVN2-35S				#6	3.7	6.6	17.3	4.3		
RVN2-3.5 M				#6	3.7	6.6	19.5	6.5		
RVN2-3.5 L				#6	3.7	8.5	21.8	7.7		
RVN2-4 S				#8	4.3	6.6	19 5	6.5		
RVN2-4L				#8	4.3	8.5	21 8	7.7		
RVN2-5 S				#10	5.3	8.5	21.8	7. 7		
RVN2-5L				#10	5.3	9.5	21.8	7.2		
RVN2-6				1/4	6.4	12.0	26.8	11.0		
RVN2-8				5/16	8.4	12.0	26.8	11.0		
RVN2-10				3/8	10.5	14.6	31.5	14		

Black (nylon/PVC [add P at the back] optional)

Item NO	Cable Sze A.W.G	Thickness (mm)	Max Current	USA Screw	ScrewDia.d2(mm)	Size				DΦ
						W	L	F	E	
RVN3.5 4	2.5~4.0 (14-12)	1.0	37A	#8	4.3	8.0	24.5	7.7	13.0	6.5
RVN35-5 S				#10	5.3	8.0	24.5	7.7		
RVN3.5-5 L				#10	5.3	12.0	27.9	8.6		
RVN3.5-6				1/4	6.4	12.0	27.9	8.6		
RVN35-8				5/16	8.4	15.0	34.0	14		
RVN3.5-10				3/8	10.5	15.0	34.0	14		

Yellow (nylon/PVC [add P at the back] optional)

Item NO	Cable Sze A.W.G	Thickness (mm)	Max Current	USA Screw	ScrewDia.d2(mm)	W	L	F	E	DΦ
RVN5.5-3	4~6 (12-10)	1.0	48A	#4	3.2	7.2	22.7	5.9	14	7
RVN5.5-3.5				#6	3.7	7.2	22.7	5.9		
RVN5.5-4S				#8	4.3	7.2	22.7	5.9		
RVN5.5-4L				#8	4.3	9.5	26.3	8.3		
RVN5.5-5				#10	5.3	9.5	26.3	8.3		
RVN5.5-6				1/4	6.4	12.0	30	11		
RVN5.5-8				5/16	8.4	15.0	34.5	13.7		
RVN5.5-10				3/8	10.5	15.0	34.5	13.7		

Function Features

