Mesin Pemintal Wayar Elektrik Genggam WPM-NX3612AJ

Model No. WPM-NX3612AJ



SPECIFICATIONS

Model Number	WPM-NX3612AJ
Voltan Kerja	220V
Jenis	Mesin Pemintal Elektrik Genggam
Aplikasi	Pembuatan Abah-abah Kabel Industri

Mesin berpusing pegang tangan, mesin berpusing separa automatik, alat berpusing manual, mesin berpusing elektrik, mesin berpusing berbilang helai

Parameter teknikal**:**

voltan kerja	penyesuai kuasa	saiz **(mm)** •	Berat **(g)**	Panjang kabel (m)	Panjang sambungan suis kaki **(m)**
DC 24V	Input kuasa: AC100-240V / 50 / 60Hz, Output: DC24V	Panjang: 248.0 OD Maks: 51.0	535.0	1.2+2.0 (Talian kabel + talian sambungan)	2.0
Ke dalam wayar diameter lubang (mm)	Sifat wayar berpintal	**Panjang teras wayar (mm)**	Luas keratan rentas maksimum wayar berpintal **(mm^2)**	Luas keratan rentas minimum garisan berpintal **(mm^2)**	mod operasi
8/12	Sapukan pada kord fleksibel berbilang teras	10-20	4.0	0.3	Akhbar tangan/ akhbar kaki

Handheld desktop dual-purpose electric twisting machine

Multi-strands are used in parallel / can be tightened in half a second / high efficiency



Continuous copper wire Tighten the wire	easy to use Twisting is not tired
efficient Twisting	No hidden danger Non-flying copper wire



Portable mobile twisting tool

Φ13mm large-diameter screw thread opening, adapt to the thickness of the wire diameter, the transparent cover can be removed to make the opening wider

Good twisting quality	Lightweight and compact	Flexible operation	Strong applicability

6 PRODUCT FEATURES

Say goodbye to the problems of hand-tightening, tired and slow screwing



01

Suitable for multi-strand parallel operation, twisted wires within 30mm in length

02

Desktop fixed use with foot switch operation is flexible, and the operation of the entrance port is more convenient

03

Hanging and handheld use does not occupy the position of the console

04

Simple assembly line operation

05

New grip artificial mechanics design

06

Replace manual threading to improve efficiency

Handheld desktop dual-purpose electric twisting machine

Twisted wire range: wire length within 30mm
Multi-strand cord ≤30mm²



1 strand, 2 strands, 3 strands, 4 strands, 5 strands, and multiple strands of copper core cords can be automatically tightened







Hanging hook
Pedal edge wiring
Body
Manual switch
power cable
transparent lid
Twisting port

Sample display

This machine supports 1 strand, 2 strands, 3 strands, 4 strands, 5 strands, and multiple strands of copper core cords to be twisted together







Product details





Manual switch

Touch the button switch, tighten the thread in half a second, it's so fast

Twisting clamp

You can put multiple copper core wires into the twisting clamp, touch the button switch to complete the twisting

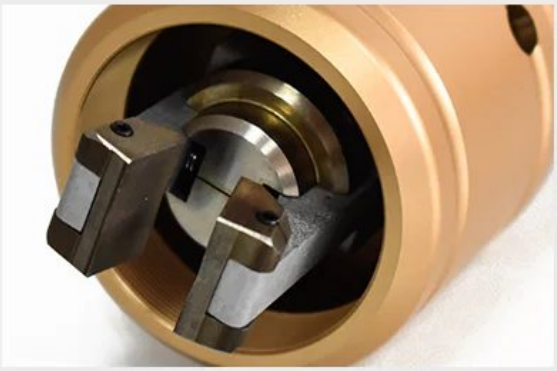

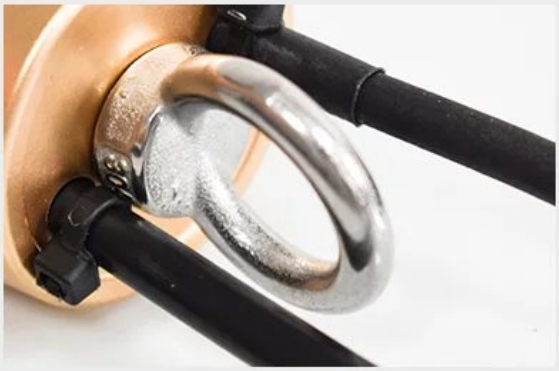

Hanging hook

Hanging and handheld use does not occupy the position of the console

Adjustable voltage

The voltage of the power adapter can be adjusted to a suitable value according to the wire specification, the smaller the wire diameter, and the larger the smaller diameter.





Desktop use

It can be fixed on the desktop, with a foot switch for flexible operation

transparent lid

The twisting machine port has a transparent cover that can be removed, and the transparent cover is larger.



Parts List



FAQ

Apakah masukan kuasa yang diterima Mesin Pemilin Wayar Pegangan Tangan Separa Automatik WPM-NX3612AJ?

Masukan kuasa ialah AC100-240V pada 50/60Hz, dengan output DC24V. Julat AC yang luas bermaksud mesin boleh digunakan di kawasan dengan voltan sesalur yang berbeza tanpa pengubah berasingan.

Apakah dimensi fizikal Mesin Pemilin Wayar Pegangan Tangan WPM-NX3612AJ?

Mesin ini mempunyai panjang 248.0 dan OD maksimum 51.0. Format pegangan tangan yang padat ditujukan untuk kerja pemilinan yang dilakukan terus pada harness dan bukan di stesen meja tetap.

Bolehkah Mesin Pemilin Wayar Pegangan Tangan Separa Automatik WPM-NX3612AJ beroperasi pada voltan sesalur yang berbeza?

Ya. Ia menerima AC100-240V pada 50/60Hz dan menukarnya kepada output DC24V. Julat masukan sejagat ini sesuai untuk pemilinan wayar separa automatik di bengkel yang beroperasi pada voltan sesalur rendah atau tinggi.