Terminal Sekop SVN Nilon Terlindung 19A-48A, 3.2-10.5mm

Model No. JW-TM05



SPECIFICATIONS

Semasa	19A-48A
Diameter bolt	3.2-10.5 mm
Bahan	Tembaga
Suhu	75/105 darjah
Sarung	Nilon/PVC
Rawatan permukaan	Penyaduran timah

Terminal sekop terlindung SVN Nylon, Terminal hujung kord tembaga sekop berterusan, terminal sambungan bolt, Terminal Sekop, Terminal Sekop Svn, Bolt Terminal Tembaga

Terminal terlindung Spade Roll

Kelim yang selamat dan terjamin (untuk kord fleksibel)

Semasa: 19A-48A

Diameter bolt: 3.2-10.5 mm

Bahan Tembaga

Suhu 75/105 darjah

Sarung Nilon/PVC

Rawatan permukaan penyaduran timah

With insulation sheath fork terminal

Safe and secure crimping (for flexible cords)
Current: 19A-48A
Bolt diameter: 3.2~10.5mm



Stability means that the foundation of the terminal cannot fall off and cannot be broken

It is made by stamping process and stamped on a stamping press, which can effectively resist interference and increase the service life.



Reliable quality of real materials

Exquisite and good selection of materials makes the product
High safety performance and long service life

Copper tinned terminal block

High-quality red copper
conductive must be strong
Surface tin plating process
to resist oxidation



PVC insulation
Flame retardant material

Two materials optional

Nylon insulation
Flame retardant material



With insulation sheath blade terminal


Current: 18A-48A
Copper has good conductivity
Flame retardant and tinned



With insulation sheath spring terminal



Product parameters

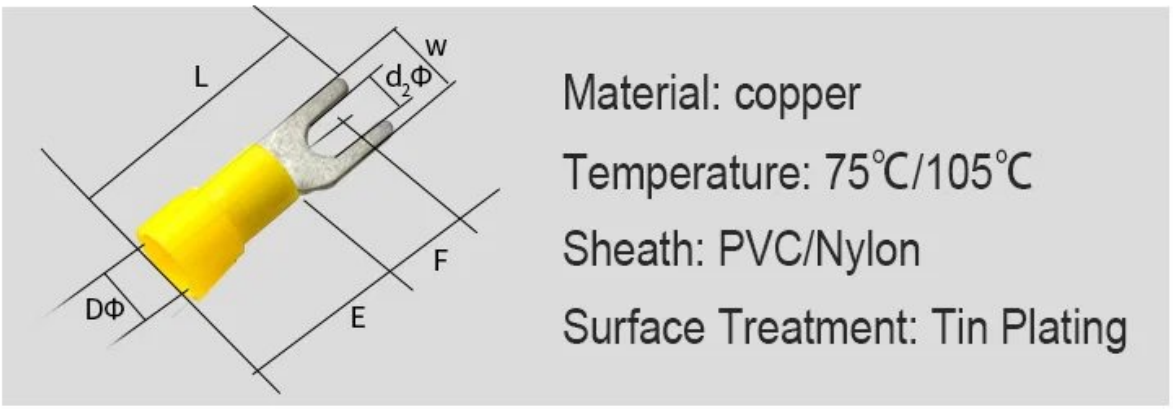

Red (nylon/PVC [add P at the back] optional)

Item NO	Cable Sze A.W.G	Thickness (mm)	Max Current	USA Screw	ScrewDia.d2(mm)	size				DΦ
						W	L	F	E	
SVN1.25- 3	0.5-1.5 (22-16)	0.75	19A	#4	3.2	5.7	21.2	6.5	10.0	4.0
SVN1.25-3.5S				#6	3.7	5.7	21 2	6.5		
SVN1.25 3.5L				#6	3.7	6.4	212	6.5		
SVN1.25- 4 S				#8	4.3	6.4	21 2	6.5		
SVN1.25-4 M				#8	4.3	7. 2	21.2	6.5		
SVN1.25-4 L				#8	4.3	8.1	21 2	6.5		
SVN1.25-5 S				#10	5.3	8.1	21 2	6.5		
SVN1.25-5L				#10	5.3	9.5	21 2	6.5		
SVN1.25- -6 S				1/4	6.4	9.5	21 2	6.5		
SVN1.25-6L				1/4	6.4	12.0	27.6	11.0		

FAQ

Apakah kadar arus yang diliputi Terminal Spade Berpenebat Nilon SVN?

Siri SVN meliputi kadar arus dari 19A hingga 48A dengan kontak tembaga. Julat ini membolehkan satu keluarga terminal melayani pendawaian kawalan ringan dan sambungan kuasa yang lebih berat.

Apakah diameter bolt yang direka untuk dipasang oleh Terminal Spade Berpenebat Nilon SVN?

Terminal spade ini menerima diameter bolt dari 3.2 mm hingga 10.5 mm. Itu meliputi pelbagai saiz stud yang biasa terdapat pada panel kawalan dan pendawaian peralatan.

Bagaimanakah saya memadankan Terminal Spade Berpenebat Nilon SVN dengan stud dan beban saya?

Pilih diameter bolt yang sesuai dengan stud anda, antara 3.2 hingga 10.5 mm, kemudian pastikan arus litar berada dalam julat 19A hingga 48A yang diliputi siri ini.